

NATIONAL-SPENCER, INC.
ZEE LINE LUBRICATION EQUIPMENT

Phone 800-231-1525

Fax 800-637-9511

Web Address www.zeeline.com

Part # 1745

Air Operated
Double Action
5:1 Oil Pump

For dispensing high density oil
from both fixed and mobile
installations

Features

- ❖ 5:1 ratio
- ❖ Bung adapter
- ❖ Delivery rate 4 gpm
- ❖ Fits 55 gallon drum
- ❖ Tube length 37"
- ❖ Air regulator with gauge, filter and automatic water drain
- ❖ Maximum pressure 116 psi
- ❖ 1 1/2" diameter suction tube
- ❖ Maximum viscosity 240 SAE
- ❖ Air consumption 8.82 CFM
- ❖ 1/2" x 48" oil hose
- ❖ 1/4" x 48" connection hose
- ❖ Foot valve
- ❖ Ball valve
- ❖ Oil outlet swivel
- ❖ Quick connect couplers for air

Recommended for


- ✓ High viscosity oil

Number of boxes and contents

- ❑ 1 box 53" x 4 1/2" x 4" (19 lb.)
- ❑ UPC Code 0 1595441745 3

Application



- Suitable for all applications, particularly centralized installations

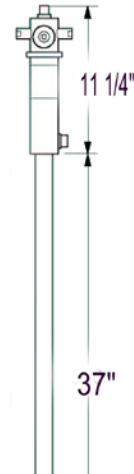

Principle of DOUBLE-ACTING pump

Pumping piston upstroke

Pumping piston downstroke

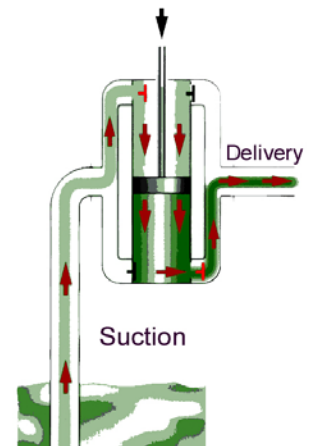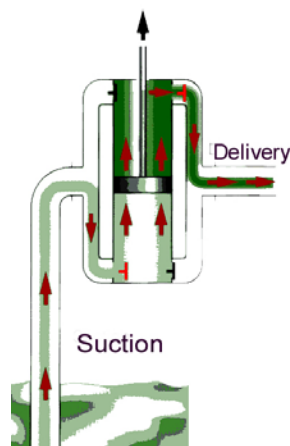

In a double-acting pump the pumping piston delivers the fluid in both upstroke and downstroke.

A double-acting pump delivers the fluid in an even and non-pulsing manner.