

75' MAXIMUM HOSE CAPACITY

FLUIDS HANDLED


- Air.
- Water.
- Antifreeze and windshield wash solutions.
- Synthetic and mineral oils.
- DEF / AdBlue®
- Waste Oil Evacuation.
- Diesel.
- Grease.

MARKETS / APPLICATIONS

- Truck dealers.
- Service shops.
- Fleets.
- Lube trucks.
- Mining and construction.
- Railroad and mass transit.
- General manufacturing.

MOUNTING

- Floor.
- Wall.
- Ceiling.
- Tank.

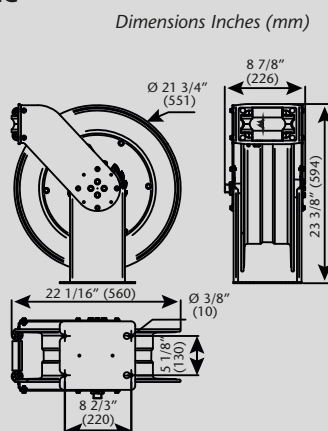

Full metal, Heavy-Duty double pedestal hose reels with hose capacity up to 50' x 3/4" or 75' x 1/2" hose.



04

HOSE REELS

HOSE REEL PART No.	HOSE LENGTH	HOSE I.D.	OUTLET THREAD	MAX. WORKING PRESSURE	NET WEIGHT	REEL ONLY WITH SWIVEL PART No.
AIR, WATER AND WATER BASED FLUIDS						
505 120	75'	1/2"	1/2" NPTM	300 psi	79.3 lb	505 002
505 121	50'	3/4"	3/4" NPTM	300 psi	83.2 lb	505 002
DIESEL						
505 425	50'	3/4"	3/4" NPTM	200 psi	83.7 lb	505 002
LUBRICANTS						
505 220	75'	1/2"	1/2" NPTM	2,000 psi	80.3 lb	505 002
505 221	50'	3/4"	3/4" NPTM	1,250 psi	84.7 lb	505 002
HIGH PRESSURE GREASE AND HYDRAULIC FLUID						
505 330	75'	3/8"	3/8" NPTM	4,000 psi	86 lb	505 014
DEF (STAINLESS STEEL AND ACETAL FLOW PATH)						
505 550	50'	3/4"	3/4" NPTM	300 psi	85 lb	505 502

- Very tough construction able to stand regular use and abuse in Intensive Duty applications.
- Fatigue resistant steel spring for years of durable performance and even load when pulling and recoiling the hose.
- Fully ported shaft and swivel.
- Spool mounted on two permanently lubricated and sealed ball bearings to reduce torque load on spring for smooth retraction and longer life.
- Large effective radial latching area for easier operation.
- Hose guide arm can be placed in different positions to accommodate any method of mounting.
- Narrow footprint allows mounting more reels on the same surface.

Reel includes inlet swivel, reel with hose includes hose stop.
Inlet connecting hose: not included.
See hose section for all hose models.

MANUAL FOR ALL 505 SERIES HOSE REELS: 850 825