



Model 515 Series AST Remote Spill Container

SPECIFICATION SHEET

Application

Remote fill containers provide containment for small spills that may occur at the fill point during remote filling operations.

Features and Details

- Single connections in 2", 3" or 4" female threads
- Dual connections in 2" or 3" (may be combined)
- 15 gallon capacity
- Gas spring cylinder holds the lid in the up position when fueling
- Lockable with a padlock
- Weather-tight enclosure
- Vent cover
- 2 Inch female threaded return pump connection
- 1" NPT drain with locking ball valve
- Base to centerline connection height 30" to 48" pedestal model
- Base to centerline connection height 31" to 47" Four leg stand model
- Container 22-1/2" wide x 24" deep x 24-1/4" height
- Four leg stand ships knocked down and requires minimal assembly

Materials of Construction

- Container and lid... 12 gauge steel, powder coated white
- Pipe connection... powder coated steel
- Pedestal mount... Schedule 40 steel pipe, powder coated steel white
- Adjustable four-leg stand... 10 gauge stainless steel or powder coated steel white
- Ball valve... brass
- Gasket... Teflon

Code Compliance

Meets the new and revised requirements for CAN-ULC-S663-11 (effective September 25, 2015), Florida DEP EQ 535



515
(pedestal mount)



515
(4 leg stand)

Item numbers and drawings on next page.



MORRISON BROS. CO.




Model 515 Series AST Remote Spill Container (continued)

SPECIFICATION SHEET


Item Number	A	B	C	D	E	F	G	H
515---0200 AC	P	1	2"	B	Y	23"	24"	136.50
515---0300 AC	P	1	3"	B	Y	23"	24"	138.0
515---0400 AC	P	1	4"	B	Y	23"	24"	140.0
515---2200 AC	P	2	2" & 2"	B	Y	23"	24"	147.0
515---2300 AC	P	2	3" & 3"	B	Y	23"	24"	150.0
515---3200 AC	P	2	2" & 3"	B	Y	23"	24"	148.50
515-ST0200 AC	S	1	2"	B	Y	23"	24"	136.50
515-ST0300 AC	S	1	3"	B	Y	23"	24"	138.0
515-ST0400 AC	S	1	4"	B	Y	23"	24"	140.0
515-ST2200 AC	S	2	2" & 2"	B	Y	23"	24"	147.0
515-ST2300 AC	S	2	3" & 3"	B	Y	23"	24"	150.0
515-ST3200 AC	S	2	2" & 3"	B	Y	23"	24"	148.50
515OEM0200 AC	T	1	2"	T	Y	23"	24"	103.0
515OEM0300 AC	T	1	3"	T	Y	23"	24"	101.0
515OEM2200 AC	T	2	2" & 2"	T	Y	23"	24"	107.0
515OEM2300 AC	T	2	3" & 3"	T	Y	23"	24"	103.0
515ST-0100 AS	Four leg adjustable stand, powder coated							
515STS0100 AS	Four leg adjustable stand, stainless steel							

SPECIFICATION OPTIONS:


- A—Mounting connection: Pedestal mount female thread (P), four leg stand (S), or back mount 4 tabs (T)
 B—Number of ports
 C—Port sizes, Female NPT
 D—Port location, Back (B), Top (T)
 E—ULC Listed (Y), Not Listed (N)
 F—Width (inches) (+/- 1/2")
 G—Height (inches) (+/- 1/2")
 H—Shipping weight (lbs)

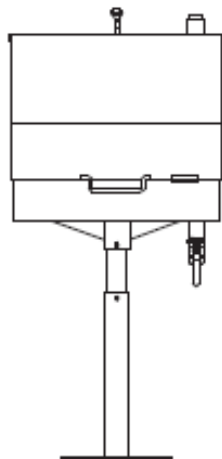


Front

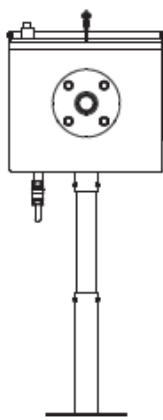

Back
(Single)

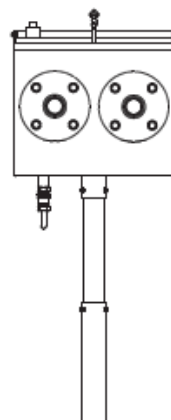

Back
(Double)

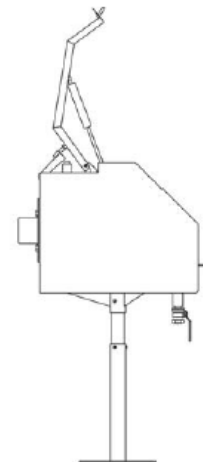

Side

570 E. 7th Street, P.O. Box 238 | Dubuque, IA 52004-0238

t. 563.583.5701 | 800.553.4840 | f. 563.583.5028

www.morbros.com



MORRISON BROS. CO.