

## Materials

**Cap:** Cast zinc alloy  
(powder coated  
yellow or grey)

**Lever:** Ductile iron

**Gasket:** Nitrile




## Ordering Specifications

| Product #    | in. | mm  | lbs. | kg   |
|--------------|-----|-----|------|------|
| 634LPC-0400  | 4   | 102 | 3.5  | 1.59 |
| 634LPC-0400D | 4   | 102 | 3.5  | 1.59 |

## Replacement Parts

| Part #  | Description   |
|---------|---------------|
| H15005M | Buna-N Gasket |

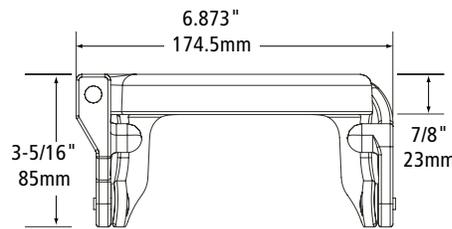

**634LPC**

Note: Effective height above adaptor: 1/2"

## OPW 634LPC Low Profile Top-Seal Fill Cap

The OPW 634LPC Low Profile Top-Seal Fill Cap is designed for tight installations where the clearance between the top of the fill adaptor and the underside of the spill container cover is limited. The rugged iron lever provides a positive cam-action that seats the cap firmly in the adaptor groove for a water and vapor-tight seal. When engaged, the lockable cap adds only 1/2" to the final height of the adaptor. The 634LPC can be used with the 4" OPW 633T, 633TE, 633TC, and 61SA series top-seal fill adaptors.



Look for this label for authentic OPW EVR Approved products. EVR Approved for E85

## Materials

**Cap:** Duratuff®

**Lever:** Brass

**Gasket:** Nitrile

**Pivot pin:** Stainless steel

**Color:** Grey




## Ordering Specifications

| Product #  | in. | mm | lbs. | kg  |
|------------|-----|----|------|-----|
| 634TE-7085 | 3   | 76 | 1.11 | .50 |

## Replacement Parts

| Part #   | Description |
|----------|-------------|
| C01094RB | Lever       |
| H10765M  | Gasket      |
| H10731RE | Pivot Pin   |

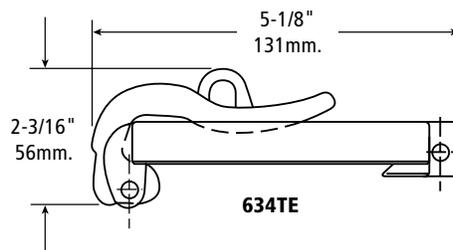

**634TE**

## OPW 634TE Single Lever Action Top-Seal Cap

The OPW 634TE is a Single Lever Action Top-Seal Cap designed to mate with 3" OPW 633T Top-Seal Adaptors.

The locking lever seats in the groove in the adaptor, providing a cam-down action on the cap for a positive water and vapor-tight seal. The 634TE can be locked with a padlock or wire seal. Patent #3,118,561.