

B^{DC PUMPS} I-PUMP



EN. Dual rotary Fuel vane pumps for transferring diesel fuel, characterized by high flow rates. Available in 12 and 24 Volt versions.

Technical features:

- Dual Vane pump with rotor.
- By-pass valve incorporated into the pump body.
- Working cycle of 30 min.
- Integrated On/Off switch.
- Flanged 1" connectors.

ES. Bombas de paletas para transferencia. Bomba rotativa de paletas para el trasiego de diésel, caracterizada por su caudal elevado. Disponible en versiones 12V y 24V.

Características técnicas:

- Bomba de paletas con rotor.
- Válvula de bypass incorporada.
- Ciclo de trabajo de 30 min.
- Interruptor y conexiones hembras de 1".

PT. Bombas com palhetas para transferência. Bomba de tipo rotativo volumétrico com palhetas para transferência de óleo diesel, caracterizada por alta capacidade. Disponíveis em versões de 12 e 24 Volts.

Características técnicas:

Bomba do tipo com palhetas e rotor. Válvula by-pass incorporada no corpo da bomba. Ciclo de trabalho de 30 min. Interruptor on/off integrado. Encaixes com flange de 1".


PERFORMANCE

- Flow rate up to 25 GPM
- 12 - 24 V DC operation
- Duty cycle 30 min.

- Caudal de hasta 85 l/min
- Versiones 12V y 24V CC
- Ciclo de funcionamiento 30 min.

- Caudal até 85 l/min
- Funcionamento 12 - 24 V DC
- Ciclo de trabalho 30 min.

DIMENSIONS

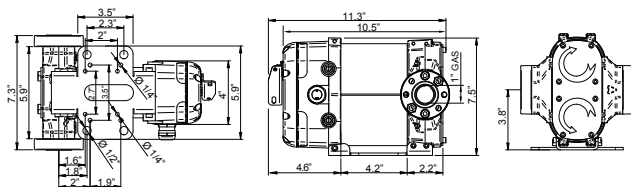

GUARANTEE



Guaranteed IP55 protection
Prevents water and dust entering the motor.

PRODUCTS' RANGE

Part #	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
FOO36305	8.5	18	345x175x255	13x7x10	1
FOO36306	10.4	22	345x175x255	13x7x10	1
FOO22220A	21.7	48	584x406x343	23x16x13.5	1



PUMPS

Flow rate



up to
25
GPM



PIUSI
USA



Bi-Pump Kit
Includes:
Auto-nozzle
18 ft. of delivery hose
Telescopic downtube
Tank connector

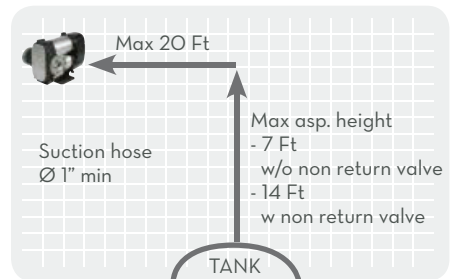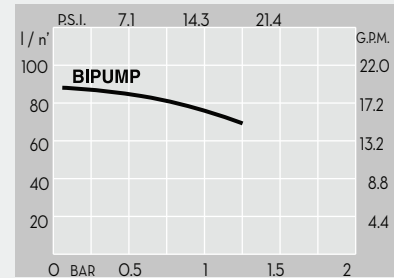

2YEAR
WARRANTY

FEATURES

On/Off switch



Flanged connect.



ON REQUEST

Kit Carry



PRODUCTS' RANGE TECHNICAL DATA

Part #	Description	Fluids type	Flow rate		Voltage			Duty cycle min.	rpm	Meter mod.	Inlet NPT
			l/min	gpm	DC Volt	Power Watt	Amp. max.				
FOO36305	Bi-pump 12V with cable 13 ft.	D	95	25	12	500	42	30	2000	-	1"
FOO36306	Bi-pump 24V with cable 13 ft.	D	95	25	24	500	21	30	2000	-	1"
FOO22220A	Bi-pump Kit	D	95	25	12	500	42	30	2000	-	1"