



DP-20 Diaphragm Hand Pump

UL and non-UL models available

- Up to 20 Gallons/75 Litres per 100 strokes
- Pumps Gasoline, Diesel, Kerosene, Hydraulic Fluid and Oil (Up to 30 wt.)
- Aluminum Housing (Corrosion-Resistant & Lightweight)
- Handle Locks for Security
- Anti-Siphon Valve
- Fits 2" NPT Bung
- Portable

Choose our diaphragm pump for dirty or contaminated fluids. The DP-20 is maintenance free and so simple to use.






DP-20 Diaphragm Hand Pump

UL and non-UL versions available

SPECIFICATIONS

The GPI DP-20 Diaphragm Hand Pump is compatible with a wide variety of petroleum products and fits any container with a 2-inch NPT bung.

MODEL	DP-20 or DP-20-UL
PART NUMBER	138000-01 for Non- UL Model / 138000-02 for UL Model
PUMP TYPE	Diaphragm
FLOWRATE	0.2 gallon (0.75 litres) per stroke cycle.
NOZZLE TYPE	Thermoplastic
HOSE SIZE	3/4 inch x 8 ft. or 3/4 inch x 8 ft. U.L. Listed Hose
TANK FITTING	2 in. NPT
INLET/OUTLET	1 in. / 3/4 in.
SUCTION PIPE	Plastic, adjustable from 22 to 40 in. (56-102 cm).
USE WITH	Gasoline (up to 15% alcohol blends such as E15), Diesel fuel (up to 20% biodiesel blends such as B20), Kerosene, Petroleum products such as medium Oil (Up to 30 wt.) and Hydraulic Fluid.

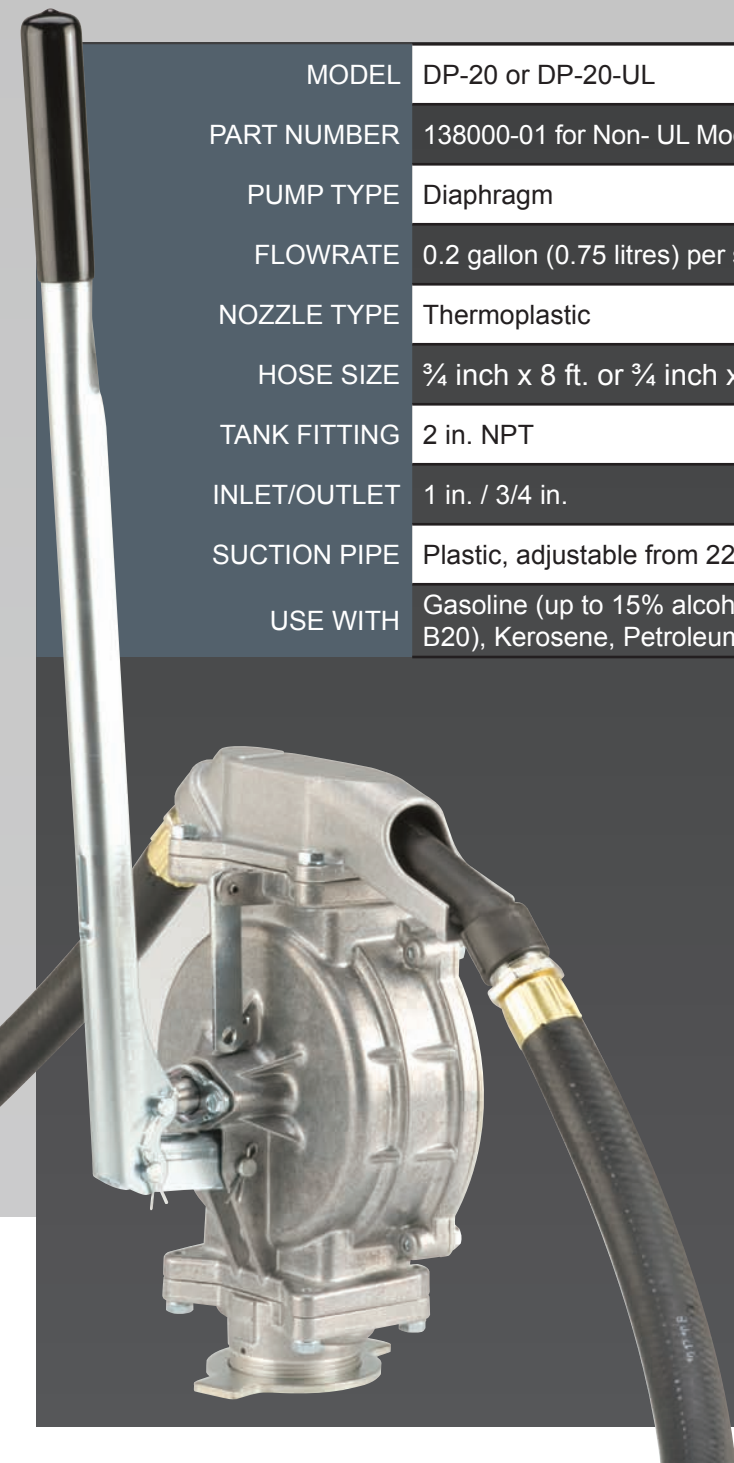

PARTS INCLUDED



For more information visit www.gpipumps.net, or contact us at 800-835-0113 or 316-686-7361.