



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLES



WASTE OIL EQUIPMENTS

K600/3

FEATURES

- ADJUSTABLE FLANGES
- EXTREMELY ACCURATE
- SUITABLE FOR INDUSTRIAL APPLICATIONS
- IDEAL FOR MOBILE INSTALLATIONS
- LOW ENERGY CONSUMPTIONS

PERFORMANCE

up to
15.8 GPM

(60 L/min)

FLOW RATE

± 0.5 %

ACCURACY

1015 PSI

PRESSURE

0.2 %

REPEATABILITY


The Piusi K600/3 is an oval gear meter suitable for monitoring the delivery of low, medium and high viscosity oils. The meter is equipped with an integrated filter and is available in pulser version.



K600/3



K600 2-3 PULSER

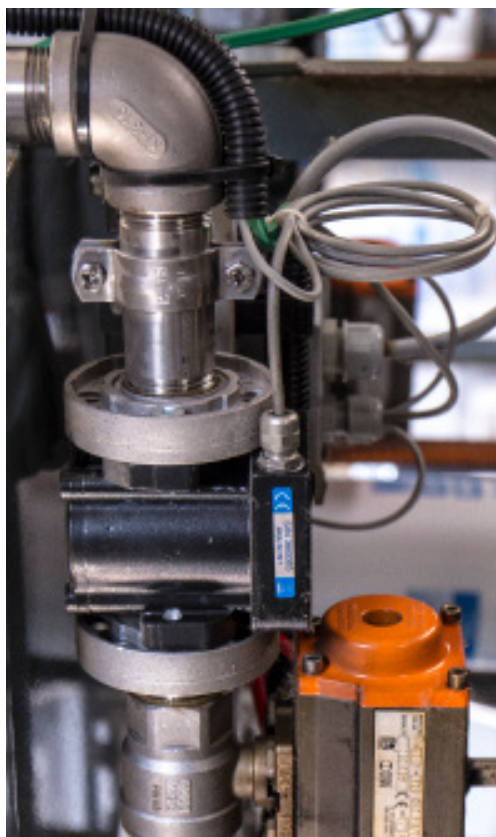

PACKAGING

PART #	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
METERS						
FOO496A10	2.4	5.4	203X127X140	8X5X5.5	-	1
PULSER						
FOO472A10	1.2	2.8	203X127X140	8X5X5.5	-	1



FILTRATION



FLUID MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE

PIUSI
USA®

AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE




OIL



WATER



WINDSCREEN

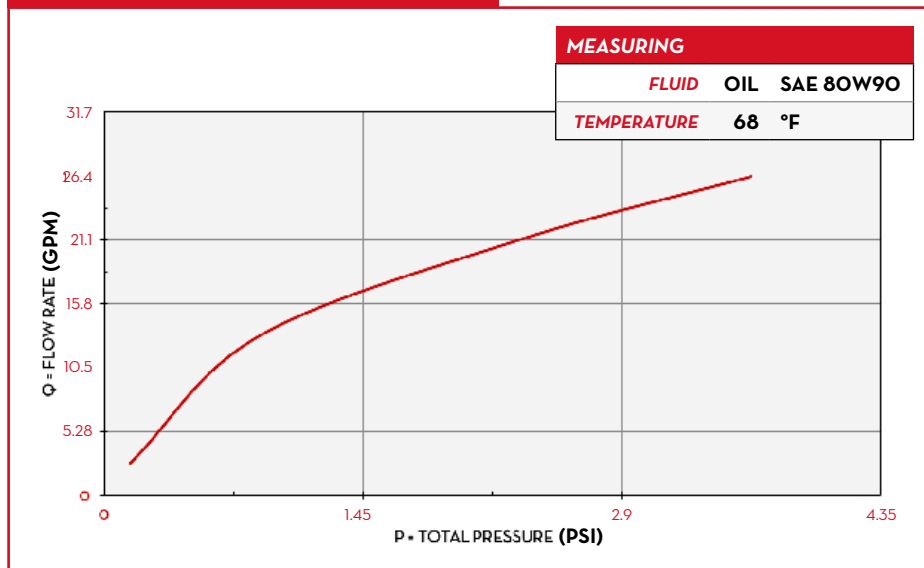CHARTS**IN THE BOX**

- K600/3 METER
- INSTRUCTION MANUAL

DETAILS


RESET/CALIBRATE BUTTON



ALUMINUM BODY





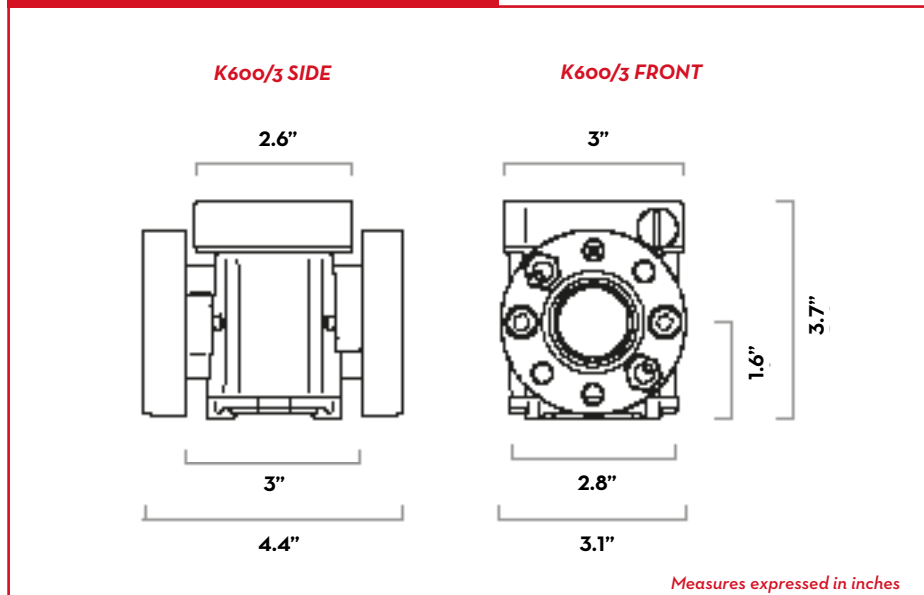

OVAL GEAR

DIMENSIONS**MATERIALS**

- BODY: ALUMINUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

PART #	DESCRIPTION	FLUIDS TYPE	FLOW RATE		PRESSURE		BATTERY INCLUDED NO. 2 2X1.5V	FLANGE	INLET OUTLET	INLET FILTER
			L/MIN	GPM	BAR	PSI				
METERS										
FOO496A10	K600/3 OIL	 	6 - 60	1.58 - 15.8	70	1015	YES	YES	3/4" NPT	YES
PULSERS										
FOO472A10	K600 2-3 PULSER	 	6 - 60	1.58 - 15.8	70	1015	-	YES	3/4" NPT	YES

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PRINT

K600/3

ELECTRONIC METERS