


Engineered for high performance and longevity, the PRO35 gets the job done fast and efficiently.

PRO35-115

- Extended duty cycle tested to exceed industry standards
- Center based inlet includes pressure relief and easy fuel strainer access
- Field replaceable switch and vanes
- Tank adapter included
- Thermally protected motor
- Vacuum breaker ready, see Accessories for kit (page 10)
- Extreme Temperature Series (XTS) model available


PRO35-115 SPECIFICATIONS

Flow Rate	35 GPM (132 L/min)
Voltage	115V or 230V (ac)
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Inlet / Outlet Size	1 ¼ in. / 1 in. NPT
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Nozzle Holder	Lockable
Warranty	4 Year

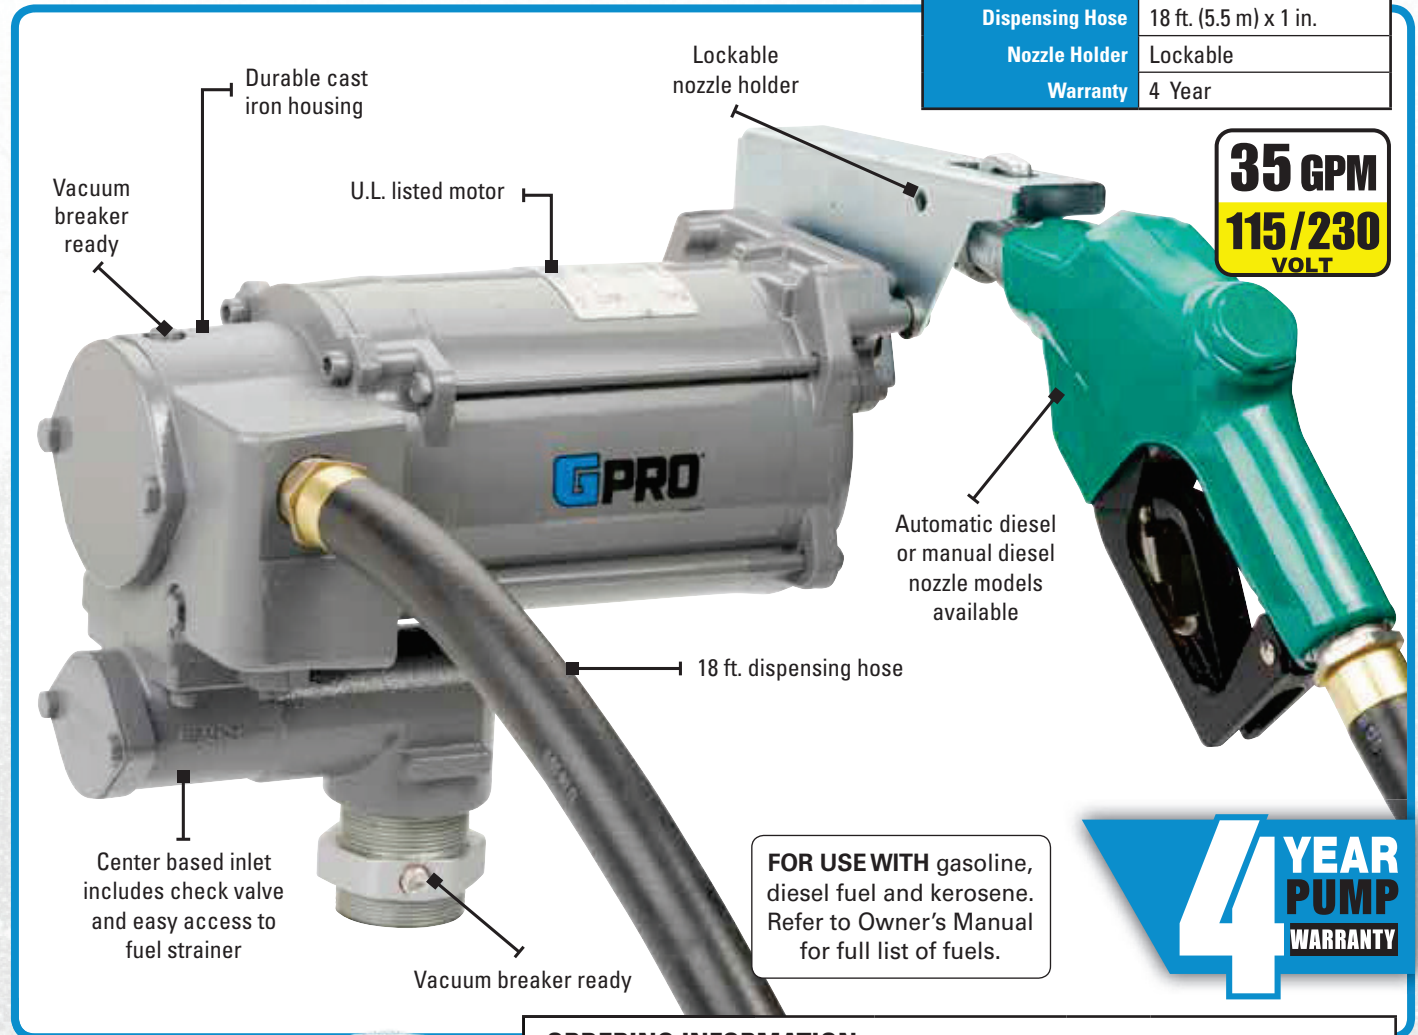

ORDERING INFORMATION

Model	Part No.	Nozzle	Hose	Temperature Rating
PRO35-115AD	504000-03	Automatic Diesel	18 ft.	-20° F / -29° C
PRO35-115MD	504000-02	Manual Diesel	18 ft.	-20° F / -29° C
PRO35-115PO	504000-01	None	None	-20° F / -29° C

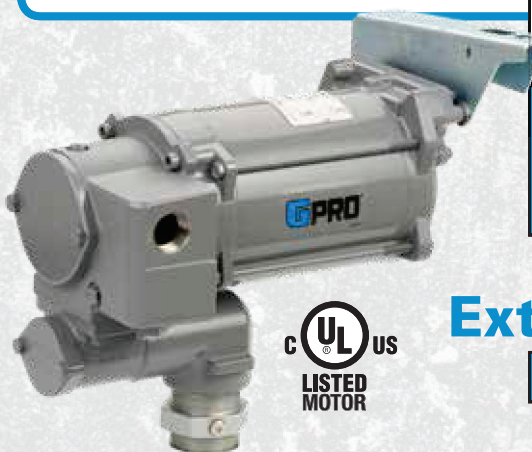

Extreme Temperature Series (XTS)

PRO35-115PO/XTS	504000-05	None	None	Tested to -40° F / -40° C
-----------------	-----------	------	------	---------------------------