



PRODUCT SHEAR VALVES

EBW® product shear valves immediately stop product flow in the event of fire or collision at the dispenser. A patented adapter shears upon impact, causing the poppet to seal on the valve body, preventing fuel spillage. If fire occurs, a fusible link releases the fulcrum arm, engaging the poppet.

HIGHLIGHTS

- Standard 1½" openings allow minimal flow restriction and a pre-drilled test plug is included for line pressure testing
- Can be boss or U-bolt mounted.
- E-coated for corrosion protection and AGB compatibility.
- Easy-to-replace adapters slide on and off valve base without lifting the dispenser.
- Adapters are available in male, female or, union connections.
- Single poppet models stop product flow from the pump. Double poppet models stop flow from the pump and dispenser piping.

ORDERING INFORMATION

Shear Valves

| Model | Description |
|------------|---|
| 662500901 | Single poppet shear valve, union, 1½" NPT |
| 662500902 | Single poppet shear valve, female, 1½" NPT |
| 662500903 | Single poppet shear valve, male, 1½" NPT |
| 662510902 | Single poppet shear valve, female, 1½" BSPT |
| 662510903 | Single poppet shear valve, male, 1½" BSPT |
| 662501901 | Double poppet shear valve, union, 1½" NPT |
| 662501902 | Double poppet shear valve, female, 1½" NPT |
| 662501903 | Double poppet shear valve, male, 1½" NPT |
| 662511902 | Double poppet shear valve, female, 1½" BSPT |
| 662511903 | Double poppet shear valve, male, 1½" BSPT |
| 662502902* | Double poppet shear valve, normally closed, female, 1½" NPT |

*UL listed only.


SPECIFICATIONS

- Fusible link closes poppet at 165.0 °F (73.9 °C).
- Top and body material: E-coated cast iron
- Poppet and O-ring: Fluorocarbon
- Stem and poppet spring: Stainless steel

Approvals/Certifications

- Meets NFPA 30A requirements.
- UL and ULC listed. UL 842A and 842B approved for E-85 alcohol/gas blends and Biodiesel.
- ATEX approved, SIRA 13ATEX9035U.

Dimensions

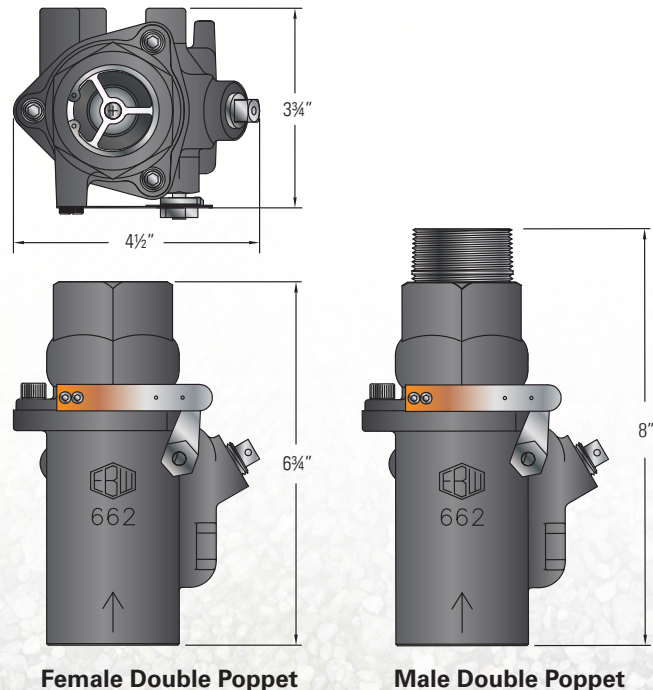

Female Double Poppet

Male Double Poppet



franklinfueling.com
3760 Marsh Rd. • Madison, WI 53718, USA
Tel: +1 608 838 8786 • Fax: +1 608 838 6433
Tel: USA & Canada +1 800 225 9787 • Tel: UK +44 (0) 1473 243300
Tel: Mex 001 800 738 7610 • Tel: FR +33 (0) 1 69 21 41 41 • Tel: CH +86 10 8565 4566



© 2018 Franklin Fueling Systems. All Rights Reserved.

FFS-0264 12-18