


# STP-CB 3/5 MAGNETIC STARTER

The FE Petro™ magnetic starter incorporates ambient compensated relays with quick trip heaters and three leg protection to assure proper pump motor protection.

## STP-CB 3/5 WIRING DIAGRAM

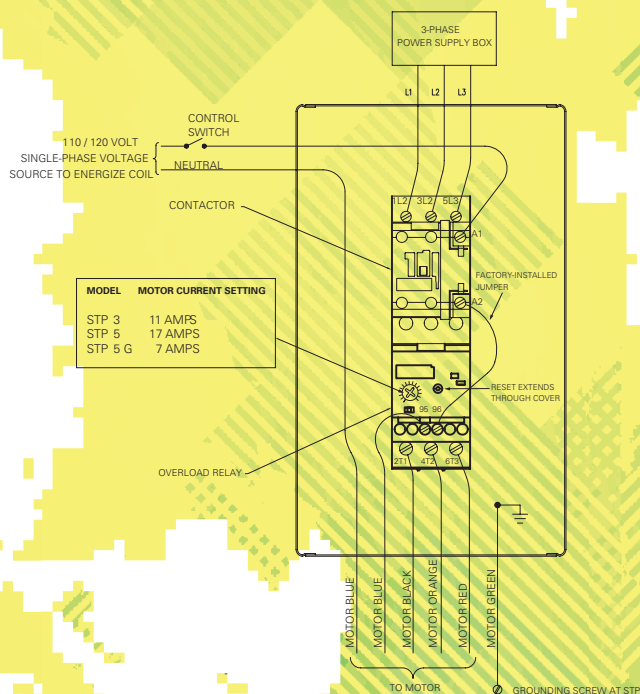

## SPECIFICATIONS

- Compatible with three-phase FE Petro™ 3 and 5 hp submersibles and most compatible models.
- Relay rating: 5 hp.
- Relay coil hook signal rating: 120 Volts for all versions except CBB5H, which is energized by 220 Volt dispenser signal.
- Incorporates three-leg contactor and adjustable overload relay with reset button.

### Approvals

- Consult factory for applicable approvals.

### Quality Certification

- Franklin Fueling Systems is an ISO 9001 Certified Manufacturer.

## CB 3/5 MAGNETIC STARTERS

Part Number	Description
401220903	STP-CB3 three-phase control box with adjustable overload, 120 Volt relay, 3 hp, 208-230 Volt, 60 Hz pump control
401220904	STP-CB5 three-phase control box with adjustable overload, 120 Volt relay, 5 hp, 208-230 Volt, 60 Hz pump control
401220993	STP-CB5G three-phase control box with adjustable overload, 120 Volt relay, 5 hp, 575 Volt, 60 Hz pump control
401220933	STP-CBB5H three-phase control box with adjustable overload, 220 Volt relay, 5 hp, 460 Volt, 60 Hz pump control